


2000 PUR

PRODUCT SPECIFICATION



Key Features

- > Heavy-duty homogeneous vinyl flooring with duotone marbleised decoration
- > Broad palette of vibrant shades
- > Available in sheet & tile
- > Low cost, polish-free maintenance
- > Heavy traffic areas

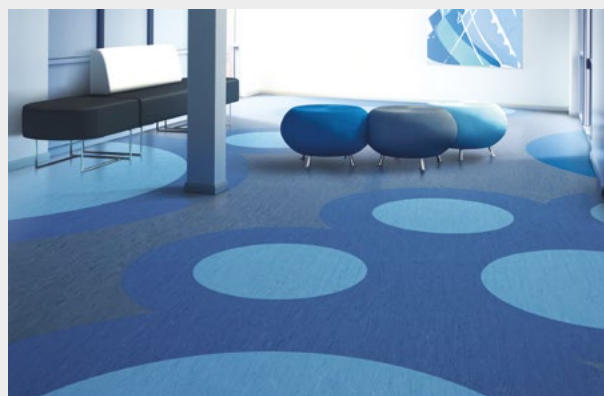

Product Format	Standard	Result
Gauge	ISO 24346 (EN 428)	2.0mm, 2.5mm
Total Weight	ISO 23997 (EN 430)	2.0mm: 3550g/m ² 2.5mm: 4552g/m ²
Finish		PUR

Sheet & Tile Sizes	Size	Shades	Quantity per Box	Coverage per Box/Roll
Sheet	2.0mm: 2m x 20m	20	-	40m ²
	2.5mm: 2m x 15m ✦	6	-	30m ²
Tile	2.0mm: 300mm x 300mm	20	50	4.5m ²
	2.0mm: 608mm x 608mm	20	14	5.17m ²
	2.5mm: 300mm x 300mm ■	6	40	3.6m ²

Performance Requirements	Standard	Result
General Performance	ISO 10581	Conforms
	ASTM F1913	Conforms
	ASTM F1700	Class I, Type A
Use Area	ISO 10874 (EN 685)	23, 34, 43
Slip Resistance	EN 13893	Class DS
	DIN 51130 / DIN EN 16165 Ann. B	R9
	AS 4586	R9
	ASTM D2047	SCOF ≥0.6
Binder Content	ISO 10581	Type II
Abrasion Resistance	EN 660-2	Group M
Reaction to Fire	EN 13501-1	Class Bfl-S1
	ASTM E648	Class 1 (2.0mm)
	ASTM E662	<450 (2.0mm)
	CAN/ULC S102.2	FSV < 300; SDV < 500 (2.0mm)
	AS ISO 9239-1	>8.0 kW/m ²
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ASTM F970 (Modified)	≤0.005" (750psi)
	ISO 24343-1	≤0.10mm

Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
Flexibility	ASTM F137	Pass
Underfloor Heating		Suitable, max 27°C
Light Fastness	ISO 105-B02 (Method 3)	≥6
Resistance to Light	ASTM F1515	$\Delta E \leq 8.0$ - Meets
Resistance to Heat	ASTM F1514	$\Delta E \leq 8.0$ - Meets

Sustainability

Standard	Result
BRE Green Guide	A+ ENP 472
Generic EN 15804 EPD	Available
Recyclable	100%
Recycled Content	25%
REACH	Compliant
Indoor Air Comfort Gold	Eurofins certified product
FloorScore	Certified
Finnish M1 Classification	Certified (2.0mm)
AgBB/ABG	Pass
VOC Emissions	TVOC after 28 days $\leq 10 \mu\text{g}/\text{m}^3$
Responsible Sourcing	BES 6001 Excellent

Acoustic Performance

Standard	Result
Impact Sound Reduction	ISO 10140-3 4dB (2.0mm)

Maintenance Performance

Standard	Result
Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925 Good resistance Good resistance
Alco Hand Gels	Compatible for use with most commonly used alco-based hand gels
Steam Cleaning	Suitable for steam cleaning on a periodic basis

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection. Regular light maintenance is more cost-effective than periodic heavy maintenance and more beneficial to the floor covering.

Hygiene

Standard	Result
Bacterial Resistance	ISO 846 Part C Does not favour growth
Ease of Radioactive Decontamination	ISO 8690 Excellent (2.0mm)



BS EN 14041



EN 14041

Polyflor Ltd. Head Office

PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR • Tel: +44 (0) 161 767 1111 • Email: info@polyflor.com • www.polyflor.com


© At the time of writing and publication of sheet, all the information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

2000 PUR


RANGE SHADES




Oak 8300 w/r 8320
NCS S 2010-Y30R LRV 54
◆ ■



Blossom 8900 w/r 8900
NCS S 1515-Y30R LRV 52



Buckwheat 8850 w/r 8850
NCS S 3010-Y40R LRV 39
◆ ■




Rosehip 8950 w/r 8950
NCS S 3020-Y80R LRV 37




Dawn Mist 8800 w/r 8820
NCS S 2005-Y30R LRV 60



Mint Crest 8700 w/r 8700
NCS S 2020-B60G LRV 45



Willowbank 8380 w/r 2120
NCS S 4010-B70G LRV 29
◆ ■



Glenbeck 8750 w/r 8750
NCS S 4030-B50G LRV 24




Lace Blue 8500 w/r 8500
NCS S 2502-Y LRV 47
◆ ■



Stream 8050 w/r 8200
NCS S 3010-R90B LRV 35



Stonewall 8230 w/r 8230
NCS S 4502-B LRV 29
◆ ■




Larkspur 8350 w/r 8350
NCS S 4020-R90B LRV 27
◆ ■




Wild Lilac 8650 w/r 8650
NCS S 2005-R70B LRV 51



Glacier Blue 8450 w/r 8450
NCS S 2030-B LRV 42




Thistle 8600 w/r 8600
NCS S 4030-R70B LRV 18




Sapphire 8550 w/r 8550
NCS S 4030-R90B LRV 21




Saffron 8490 w/r 3070
NCS S 2050-Y20R LRV 41



Brushed Ochre 8000 w/r 8000
NCS S 3050-Y70R LRV 23



Sequoia 8400 w/r 4120
NCS S 3040-Y80R LRV 16



Shadow 8150 w/r 8270
NCS S 7502-B LRV 12

w/r - Weld Rod

LRV - Light Reflectance Value

NCS - Natural Colour System

◆ Sheet: 2.5mm - 2m x 15m

■ Tile: 2.5mm - 300mm x 300mm

Polyflor Ltd. Head Office

PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR • Tel: +44 (0) 161 767 1111 • Email: info@polyflor.com • www.polyflor.com

© At the time of writing and publication of sheet, all the information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

V1